


# IMPULSE SEALERS FOR VACCUM PACKING VAC 520 720 1020

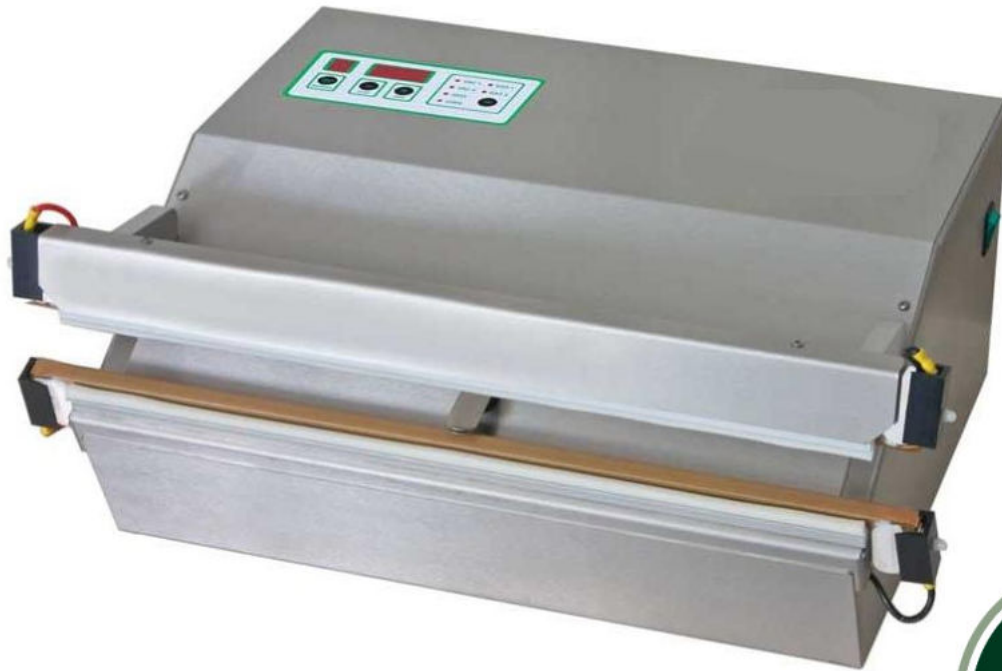

OPTION  
VALIDABLE  
ISO 11607-2

➤ **Impulse sealers**  
for vacuum packing of packages  
with pneumatic sealing  
by suction nozzle, for materials :  
PE/PE - Alu/PE - Tyvek - PET/PE

# IMPULSE SEALERS FOR VACCUM PACKING VAC 520 720 1020

## General Features :

- Storage of up to 9 programs
- Bi-active or mono welding
- Pneumatic supply : 6 bars
- Suction performance : 11 m<sup>3</sup>/h per venturi
- Adjustment of vacuum time, gas reinjection time
- Adjustment of welding and cooling time
- Control and parameter setting on digital keyboard
- Connectable to PC RS232 serial port and external printer

### Options

- Work surface
- Frame for vertical welding
- Sheath unwinder
- Control pedal

**OPTION  
VALIDABLE  
ISO 11607-2**

### Optional ISO 11607-2 standard:

**Blocking in case of non-compliance with any of the parameters used to qualify the sealer.**

**Temperature - Force - Time, are precisely controlled up to 60 times per second during the sealing cycle, in order to guarantee the repeatability of the sealing quality.**

In case of deviation from the defined parameters, the machine automatically stops working and triggers an acoustic alarm.

Technical specifications	SI VAC 520	SI VAC 720	SI VAC 1020
<b>Welding length (mm)</b>	520	720	1 020
<b>Welding width (mm)</b>	8		
<b>Speed (according to type of packaging, cycle/min)</b>	8/min		
<b>Dimensions (mm)</b>	590 x 487 x 232	790 x 487 x 232	1110 x 487 x 232
<b>Pneumatic supply</b>	6 bars		
<b>Power (W)</b>	2,5 - 3		
<b>Electric power supply</b>	230 V - 50 Hz		
<b>Weight (kg)</b>	32	35	37