


# IMPULSE SEALERS FOR VACCUM PACKING VAC 520 720 1020

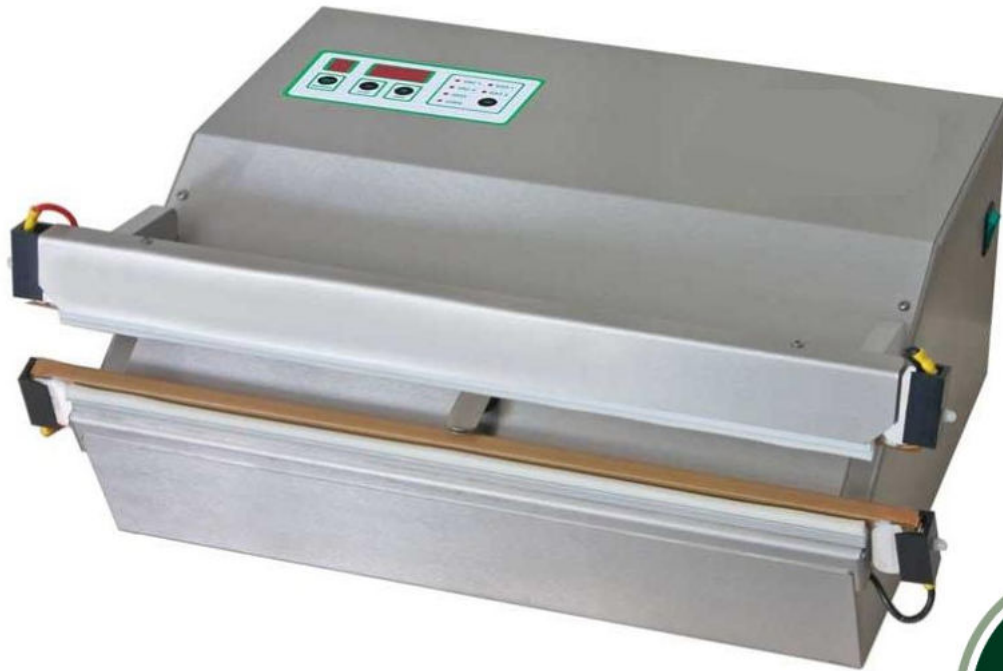

OPTION  
VALIDABLE  
ISO 11607-2

➤ **Impulse sealers**  
for vacuum packing of packages  
with pneumatic sealing  
by suction nozzle, for materials :  
PE/PE - Alu/PE - Tyvek - PET/PE

# IMPULSE SEALERS FOR VACCUM PACKING VAC 520 720 1020

## General Features :

- Storage of up to 9 programs
- Bi-active or mono welding
- Pneumatic supply : 6 bars
- Suction performance : 11 m<sup>3</sup>/h per venturi
- Adjustment of vacuum time, gas reinjection time
- Adjustment of welding and cooling time
- Control and parameter setting on digital keyboard
- Connectable to PC RS232 serial port and external printer

### Options

- Work surface
- Frame for vertical welding
- Sheath unwinder
- Control pedal

**OPTION  
VALIDABLE  
ISO 11607-2**

### Optional ISO 11607-2 standard:

Blocking in case of non-compliance with any of the parameters used to qualify the sealer.

Temperature - Force - Time, are precisely controlled up to 60 times per second during the sealing cycle, in order to guarantee the repeatability of the sealing quality.

In case of deviation from the defined parameters, the machine automatically stops working and triggers an acoustic alarm.

Technical specifications	SI VAC 520	SI VAC 720	SI VAC 1020
Welding length (mm)	520	720	1 020
Welding width (mm)	8		
Speed (according to type of packaging, cycle/min)	8/min		
Dimensions (mm)	590 x 487 x 232	790 x 487 x 232	1110 x 487 x 232
Pneumatic supply	6 bars		
Power (W)	2,5 - 3		
Electric power supply	230 V - 50 Hz		
Weight (kg)	32	35	37

phone (33) 04 74 00 59 54 • [contact@o-r-a.eu](mailto:contact@o-r-a.eu)  
584 route de Saint-Bernard - 01600 Trévoux – France

[www.o-r-a.eu](http://www.o-r-a.eu)